

VX series



Diesel Forklift Trucks

4,000kg / 4,500kg / 5,000kg / 5,500kg

- Intellix™ Vehicle Management System with CANbus technology
- 2 application matched Techtronix transmissions
- Oil immersed brakes
- ADS - Auto Deceleration System on Techtronix 100 & 200 transmission
- Controlled roll-back
- AccuTouch™ mini-lever and manual levers
- Load Sensing Hydraulics available with AccuTouch™ mini levers
- Superelastic and pneumatic radial tyres



Truck Dimensions

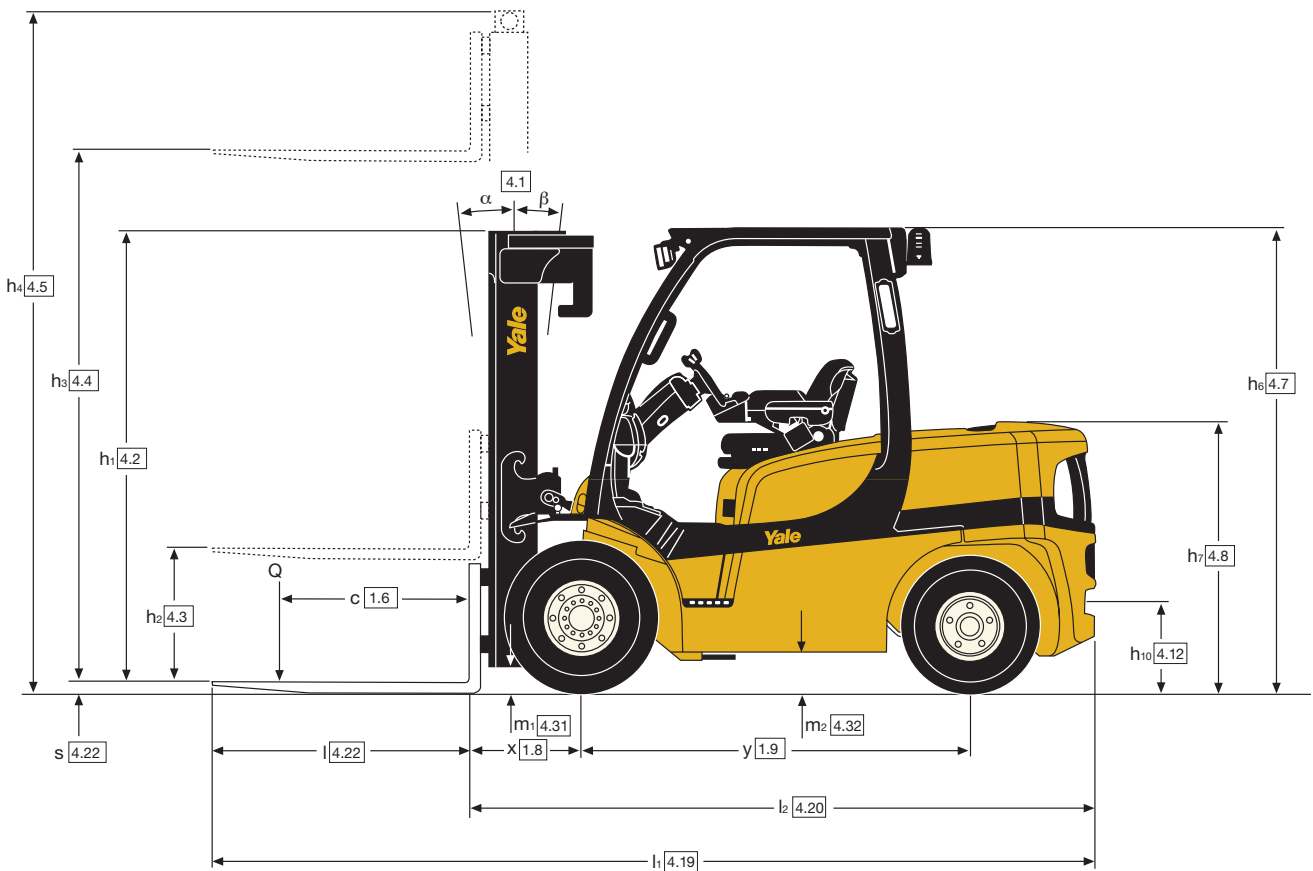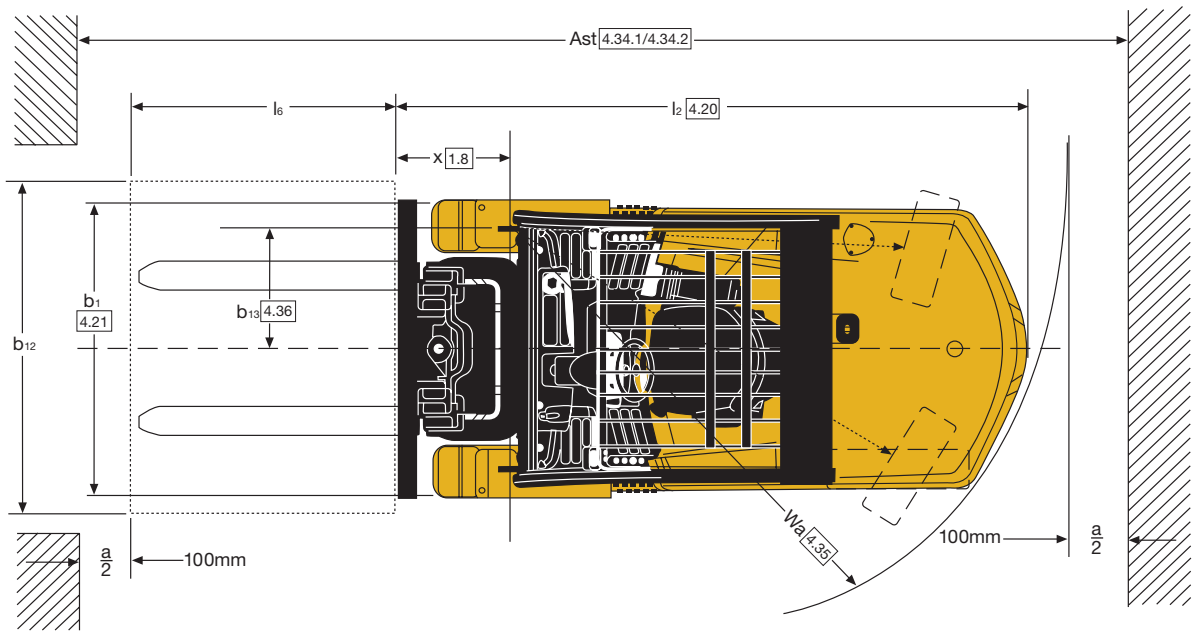

Engine Specifications

Diesel Engine Specification

Engine	Kubota V3800 E4 Stage IIIB Compliant with Diesel Oxidisation Catalyst (DOC) or Diesel Particulate Filter (DPF) as standard
Cylinders	In line 4
Displacement	3.8 litre
Power	55.0kW @ 2,200rpm
Torque	309.0Nm @ 1,400rpm


Options

- Powertrain protection system
- Premium monitoring package
- Hydraulic Accumulator, recommended for use with clamping attachments
- Keyless start (with Passcode access)
- Traction speed limiter
- Swing-out, drop-down EZ-Tank bracket
- Right hand armrest incorporating AccuTouch™ mini-lever electrohydraulic controls, direction switch and horn button
- Return-to-set tilt
- Swivel full suspension seat
- Foot directional control
- Operator password
- Mirrors - dual side view
- Alarm-reverse actuated 82-102dB(A) - self adjusting
- Amber strobe light - continuous activated
- Impact monitor
- Paper applications kits
- 4 function (2 aux) hydraulic control valve
- Load weight indicator
- Cabin and Air Conditioned Cabin
- Partial Cabins
- Lowered Overhead Guard and Cabin
- Yale Vision Telemetry System

Capacities table - Standard carriage

Load centre	GDP40VX5	GDP40VX6	GDP45SVX5	GDP45VX6	GDP50VX	GDP55VX
mm	kg	kg	kg	kg	kg	kg
0	4000	4300	4500	5000	5400	5950
200	4000	4300	4500	5000	5400	5950
500	4000	4300	4500	5000	5400	5950
600	3670	4000	4000	4500	5000	5500
800	3310	3450	3610	4030	4460	4900
1000	2760	2760	3150	3520	3900	4280
1200	2300	2300	2800	3130	3460	3800
1400	1970	1970	2520	2810	3110	3420
1600	1720	1720	2290	2560	2830	3000


Capacities graph - Standard carriage

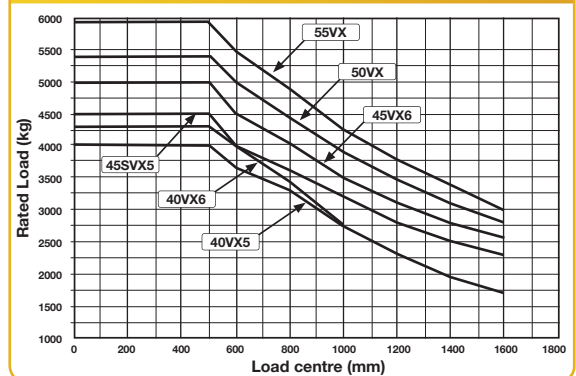

Capacities table - ISS

Load centre	GDP40VX5	GDP40VX6	GDP45SVX5	GDP45VX6	GDP50VX	GDP55VX
mm	kg	kg	kg	kg	kg	kg
0	4000	4300	4500	5000	5400	5950
200	4000	4300	4500	5000	5400	5950
500	4000	4300	4440	4970	5400	5950
600	3670	4000	4000	4500	5000	5500
800	3320	3450	3500	3920	4340	4770
1000	2760	2760	3070	3430	3800	4180
1200	2300	2300	2730	3050	3380	3720
1400	1970	1970	2460	2750	3050	3350
1600	1720	1720	2240	2500	2770	3000

Capacities graph - ISS

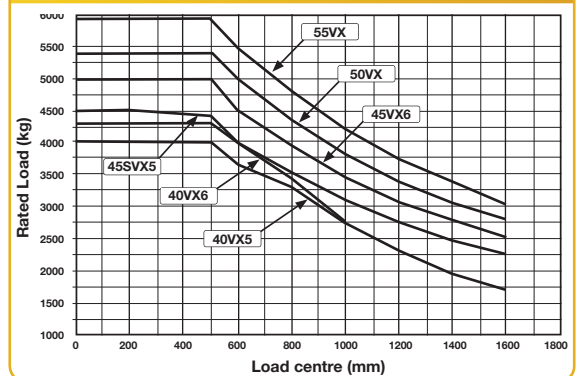

Powertrains

	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel
Combustion engine	7.1	Engine manufacturer/type		Kubota V3800 DICR-T-E4
	7.2	Engine power according to ISO 1585	kW	55
	7.3	Rated speed	min-1	2200
	7.3.1	Torque at 1/min	Nm/min-1	300 / 1400
	7.4	Number of cylinders/displacement	cm3	4 / 3769
	7.10	Battery voltage/nominal capacity ✓	(V)/(Ah)	12 / 105
	Drive mechanism	8.1	Type of drive unit	
8.2		Manufacturer/type		NMHG/Electronic
8.6		Wheel drive/drive axle manufacturer/type		Dana/WBA
8.11		Service brake		Multi Disc Brake
8.12		Parking brake		Multi Disc Brake

✓ Battery ampere hour (Ah) nominal capacity ratings are estimated.

GDP 40VX5, GDP 40VX6 Mast details and capacity ratings (kg) - Superelastic tyres

Model								GDP 40 VX5						GDP 40 VX6			
Tyre size, front								250 x 15						250 x 15			
Overall width, front								1402mm						1402mm			
Mast	h ₁ (mm)	h _{2+s} (mm)	h _{3+s} (mm)	h ₄ (mm) ⁽¹⁾	h ₄ (mm) ⁽²⁾	Tilt		Forks			Integral Sideshift			Forks		Integral Sideshift	
						F	B	Load centre (kg)			Load centre (kg)			Load centre (kg)		Load centre (kg)	
								500	600	700	500	600	700	600	700	600	700
2 Stage LFL	2175	150	3050	3815	4300	6	10	4000	3670	3580	4000	3670	3470	4000	3890	4000	3770
	2475	150	3650	4415	4900	6	10	4000	3670	3570	4000	3670	3460	4000	3870	4000	3750
	2775	150	4250	5015	5500	6	10	4000	3670	3550	4000	3670	3440	4000	3860	4000	3740
	3225	150	4950	5715	6200	6	6	3880	3560	3430	3880	3560	3320	3890	3720	3890	3610
2 Stage FFL	2175	1355	3075	3890	4325	6	10	4000	3670	3450	4000	3670	3400	4000	3750	4000	3690
	2475	1655	3675	4490	4925	6	10	4000	3670	3440	4000	3650	3380	4000	3730	3990	3670
3 Stage FFL	2175	1355	4415	5225	5665	6	6	4000	3670	3430	3970	3630	3350	4000	3720	3950	3640
	2375	1555	4950	5765	6200	6	6	3880	3560	3310	3840	3510	3230	3880	3600	3820	3520
	2475	1655	5250	6065	6500	6	6	3800	3490	3240	3760	3440	3170	3810	3530	3740	3450
	2575	1755	5550	6365	6800	6	6	3730	3420	3170	3670	3360	3090	3740	3450	3660	3370
	2775	1955	6000	6815	7250	6	6	3600	3290	3050	3530	3230	2980	3620	3330	3530	3250

⁽¹⁾ Without load backrest. ⁽²⁾ With load backrest. Specification data based on standard carriage, load backrest, and 1000mm (GDP40 VX5) / 1200mm (GDP 40VX6 - GDP 55VX) forks.

GDP 45SVX5, GDP 45VX6 Mast details and capacity ratings (kg) - Superelastic tyres

Model								GDP 45 SVX5						GDP 45 VX6			
Tyre size, front								250 x 15						300 x 15			
Overall width, front								1402mm						1450mm			
Mast	h ₁ (mm)	h _{2+s} (mm)	h _{3+s} (mm)	h ₄ (mm) ⁽¹⁾	h ₄ (mm) ⁽²⁾	Tilt		Forks			Integral Sideshift			Forks		Integral Sideshift	
						F	B	Load centre (kg)			Load centre (kg)			Load centre (kg)		Load centre (kg)	
								500	600	700	500	600	700	600	700	600	700
2 Stage LFL	2215	160	2800	3730	4065	6	10	4500	4000	3890	4440	4000	3770	4500	4340	4500	4210
	2515	160	3400	4330	4665	6	10	4500	4000	3870	4420	4000	3750	4500	4330	4500	4200
	2815	160	4000	4930	5265	6	10	4500	4000	3860	4410	4000	3740	4500	4310	4500	4180
	3265	160	4700	5630	5965	6	6	4380	3900	3730	4260	3900	3620	4390	4180	4390	4060
	3665	160	5300	6230	6565	6	6	4230	3760	3580	4090	3750	3470	4250	4030	4230	3910
	4065	160	5900	6830	7165	6	6	4040	3620	3420	3900	3580	3310	4100	3860	4050	3740
2 Stage FFL	2215	1230	2825	3810	4090	6	10	4500	4000	3860	4410	4000	3740	4500	4310	4500	4180
	2515	1530	3425	4410	4690	6	10	4500	4000	3840	4390	4000	3720	4500	4290	4500	4170
3 Stage FFL	2215	1230	4145	5130	5415	6	6	4500	4000	3820	4370	4000	3700	4500	4270	4490	4150
	2515	1530	5000	5985	6265	6	6	4300	3820	3630	4150	3810	3520	4310	4080	4290	3960
	2615	1630	5300	6285	6565	6	6	4210	3750	3560	4070	3730	3450	4240	4000	4210	3890

⁽¹⁾ Without load backrest. ⁽²⁾ With load backrest. Specification data based on standard carriage, load backrest, and 1000mm (GDP40 VX5) / 1200mm (GDP 40VX6 - GDP 55VX) forks.

GDP 50VX, GDP 55VX Mast details and capacity ratings (kg) - Superelastic tyres

Model								GDP 50 VX				GDP 55 VX			
Tyre size, front								300 x 15				300 x 15			
Overall width, front								1450mm				1450mm			
Mast	h ₁ (mm)	h _{2+s} (mm)	h _{3+s} (mm)	h ₄ (mm) ⁽¹⁾	h ₄ (mm) ⁽²⁾	Tilt		Forks		Integral Sideshift		Forks		Integral Sideshift	
						F	B	Load centre (kg)		Load centre (kg)		Load centre (kg)		Load centre (kg)	
								600	700	600	700	600	700	600	700
2 Stage LFL	2215	160	2800	3730	4065	6	10	5000	4810	5000	4670	5500	5280	5500	5130
	2515	160	3400	4330	4665	6	10	5000	4790	5000	4650	5500	5260	5500	5120
	2815	160	4000	4930	5265	6	10	5000	4780	5000	4640	5500	5250	5500	5100
	3265	160	4700	5630	5965	6	6	4890	4640	4880	4510	5380	5110	5370	4970
	3665	160	5300	6230	6565	6	6	4740	4480	4700	4350	5230	4940	5190	4800
	4065	160	5900	6830	7165	6	6	4570	4300	4520	4170	5050	4750	5000	4620
2 Stage FFL	2215	1230	2825	3810	4090	6	10	5000	4770	5000	4640	5500	5250	5500	5100
	2515	1530	3425	4410	4690	6	10	5000	4760	5000	4620	5500	5230	5500	5080
3 Stage FFL	2215	1230	4145	5130	5415	6	6	5000	4740	4990	4610	5500	5210	5490	5070
	2515	1530	5000	5985	6265	6	6	4800	4530	4770	4410	5290	5000	5260	4860
	2615	1630	5300	6285	6565	6	6	4730	4450	4690	4330	5210	4920	5170	4780

⁽¹⁾ Without load backrest. ⁽²⁾ With load backrest. Specification data based on standard carriage, load backrest, and 1000mm (GDP40 VX5) / 1200mm (GDP 40VX6 - GDP 55VX) forks.

GDP 40VX5, GDP 40VX6 Mast details and capacity ratings (kg) - Pneumatic radial tyres

Model		GDP 40 VX5										GDP 40 VX6					
Tyre size, front		250 x R15										250 x R15					
Overall width, front		1402mm										1402mm					
Mast	h ₁ (mm)	h _{2+s} (mm)	h _{3+s} (mm)	h ₄ (mm) ⁽¹⁾	h ₄ (mm) ⁽²⁾	Tilt		Forks			Integral Sideshift			Forks		Integral Sideshift	
								Load centre (kg)			Load centre (kg)			Load centre (kg)		Load centre (kg)	
						F	B	500	600	700	500	600	700	600	700	600	700
2 Stage LFL	2175	150	3050	3815	4300	6	10	4000	3670	3580	4000	3670	3470	4000	3890	4000	3770
	2475	150	3650	4415	4900	6	10	4000	3670	3570	4000	3670	3460	4000	3870	4000	3750
	2775	150	4250	5015	5500	6	10	4000	3670	3550	4000	3670	3440	4000	3860	4000	3740
	3225	150	4950	5715	6200	6	6	3880	3560	3420	3880	3560	3320	3890	3720	3890	3610
2 Stage FFL	2175	1355	3075	3890	4325	6	10	4000	3670	3450	4000	3670	3400	4000	3750	4000	3690
	2475	1655	3675	4490	4925	6	10	4000	3670	3440	4000	3670	3380	4000	3730	3990	3670
3 Stage FFL	2175	1355	4415	5225	5665	6	6	4000	3670	3430	3970	3630	3350	4000	3720	3950	3640
	2375	1555	4950	5765	6200	6	6	3870*	3550*	3310*	3830*	3510*	3230*	3880*	3600*	3820*	3520*
	2475	1655	5250	6065	6500	6	6	3800*	3490*	3230*	3750*	3430*	3160*	3810*	3520*	3740*	3440*
	2575	1755	5550	6365	6800	6	6	3730**	3420**	3170**	3670**	3360**	3090**	3740**	3450**	3660**	3370**
	2775	1955	6000	6815	7250	6	6	3600**	3310**	3050**	3530**	3230**	2980**	3620**	3330**	3530**	3250**

⁽¹⁾ Without load backrest. ⁽²⁾ With load backrest. *Wide Tread or Dual Drive Wheels Required. **Dual Drive Wheels Required. Specification data based on standard carriage, load backrest, and 1000mm (GDP40VX5) / 1200mm (GDP 40VX6 - GDP 55VX) forks.

GDP 45SVX5, GDP 45VX6 Mast details and capacity ratings (kg) - Pneumatic radial tyres

Model		GDP 45 SVX5										GDP 45 VX6					
Tyre size, front		250/70 x R15										315/70 x R15					
Overall width, front		1402mm										1450mm					
Mast	h ₁ (mm)	h _{2+s} (mm)	h _{3+s} (mm)	h ₄ (mm) ⁽¹⁾	h ₄ (mm) ⁽²⁾	Tilt		Forks			Integral Sideshift			Forks		Integral Sideshift	
								Load centre (kg)			Load centre (kg)			Load centre (kg)		Load centre (kg)	
						F	B	500	600	700	500	600	700	600	700	600	700
2 Stage LFL	2215	160	2800	3730	4065	6	10	4500	4000	3890	4440	4000	3770	4500	4340	4500	4210
	2515	160	3400	4330	4665	6	10	4500	4000	3870	4420	4000	3750	4500	4330	4500	4200
	2815	160	4000	4930	5265	6	10	4500	4000	3860	4410	4000	3740	4500	4310	4500	4180
	3265	160	4700	5630	5965	6	6	4380	3890	3730	4260	3890	3610	4390	4180	4390	4060
	3665	160	5300	6230	6565	6	6	4230*	3760*	3570*	4080*	3750*	3460*	4240*	4020*	4220*	3900*
	4065	160	5900	6830	7165	6	6	4040**	3610**	3410**	3900**	3580**	3310**	4080*	3840*	4030*	3730*
2 Stage FFL	2215	1230	2825	3810	4090	6	10	4500	4000	3860	4410	4000	3740	4500	4310	4500	4180
	2515	1530	3425	4410	4690	6	10	4500	4000	3840	4390	4000	3720	4500	4290	4500	4170
3 Stage FFL	2215	1230	4145	5130	5415	6	6	4500	4000	3820	4370	4000	3700	4500	4270	4490	4150
	2515	1530	5000	5985	6265	6	6	4250*	3820*	3630*	4150**	3810**	3520**	4310*	4070*	4280*	3950*
	2615	1630	5300	6285	6565	6	6	4210**	3750**	3560**	4070**	3730**	3450**	4230*	3990*	4200*	3880*

⁽¹⁾ Without load backrest. ⁽²⁾ With load backrest. *Wide Tread or Dual Drive Wheels Required. **Dual Drive Wheels Required. Specification data based on standard carriage, load backrest, and 1000mm (GDP40VX5) / 1200mm (GDP 40VX6 - GDP 55VX) forks.

GDP 50VX, GDP 55VX Mast details and capacity ratings (kg) - Pneumatic radial tyres

Model		GDP 50 VX										GDP 55 VX					
Tyre size, front		315/70 x R15										315/70-R15					
Overall width, front		1450mm										1450mm					
Mast	h ₁ (mm)	h _{2+s} (mm)	h _{3+s} (mm)	h ₄ (mm) ⁽¹⁾	h ₄ (mm) ⁽²⁾	Tilt		Forks		Integral Sideshift		Forks		Integral Sideshift			
								Load centre (kg)		Load centre (kg)		Load centre (kg)		Load centre (kg)			
						F	B	600	700	600	700	600	700	600	700	600	700
2 Stage LFL	2215	160	2800	3730	4065	6	10	5000	4810	5000	4670	5500	5280	5500	5130		
	2515	160	3400	4330	4665	6	10	5000	4790	5000	4650	5500	5260	5500	5120		
	2815	160	4000	4930	5265	6	10	5000	4780	5000	4640	5500	5250	5500	5100		
	3265	160	4700	5630	5965	6	6	4880	4640	4870	4500	5380*	5110*	5370*	4960*		
	3665	160	5300	6230	6565	6	6	4730*	4470*	4700*	4340*	5220*	4930*	5180*	4790*		
	4065	160	5900	6830	7165	6	6	4570**	4300**	4510**	4170**	5050**	4750**	4990**	4610**		
2 Stage FFL	2215	1230	2825	3810	4090	6	10	5000	4770	5000	4640	5500	5250	5500	5100		
	2515	1530	3425	4410	4690	6	10	5000	4760	5000	4620	5500	5230	5500	5080		
3 Stage FFL	2215	1230	4145	5130	5415	6	6	5000	4740	4990	4610	5500	5210	5490	5070		
	2515	1530	5000	5985	6265	6	6	4800*	4530*	4760*	4400*	5290*	4990*	5260*	4860*		
	2615	1630	5300	6285	6565	6	6	4730**	4450**	4680**	4330**	5210**	4910**	5170**	4780**		

⁽¹⁾ Without load backrest. ⁽²⁾ With load backrest. *Wide Tread or Dual Drive Wheels Required. **Dual Drive Wheels Required. Specification data based on standard carriage, load backrest, and 1000mm (GDP40VX5) / 1200mm (GDP 40VX6 - GDP 55VX) forks.

VDI 2198 – General Specifications, Diesel powered GDP 40VX5, GDP 40VX6, GDP 45SVX5

		GDP 40VX5				
Distinguishing mark	1.1	Manufacturer (abbreviation)	Yale	Yale	Yale	
	1.2	Manufacturer's type designation				
		Engine/Transmission	Kubota 3.8L Techtronix 100, 1-Speed	Kubota 3.8L Techtronix 200, 2-Speed	Kubota 3.8L Techtronix 200, 2-Speed	
		Model	Value	Value	Productivity	
		Brake Type	Standard or Premium Oil-immersed	Standard or Premium Oil-immersed	Premium Oil-immersed	
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas	Diesel	Diesel	Diesel	
	1.4	Operator type: hand, pedestrian, standing, seated, orderpicker	Seated	Seated	Seated	
	1.5	Rated capacity / rated load	Q (t)	4.0	4.0	4.0
	1.6	Load centre distance	c (mm)	500	500	500
1.8	Load distance, centre of drive axle to fork	x (mm)	523	523	523	
1.8.1	Load distance, centre of drive axle to fork (ISS Carriage)	x (mm)	555	555	555	
1.9	Wheelbase	y (mm)	1830	1830	1830	
Weights	2.1	Service weight	kg	6264	6264	6264
	2.2	Axle loading, laden front / rear	kg	8969 / 1295	8969 / 1295	8969 / 1295
	2.3	Axle loading, unladen front / rear	kg	2733 / 3531	2733 / 3531	2733 / 3531
Tyres/chassis	3.1	Tyres: P = pneumatic, V = cushion, SE = superelastic		SE	SE	SE
	3.2	Tyre size, front		250 x 15	250 x 15	250 x 15
	3.3	Tyre size, rear		700 x 12	700 x 12	700 x 12
	3.5	Number of wheels, front/rear (x = driven wheels)		2x / 2	2x / 2	2x / 2
	3.6	Tread, front	b ₁₀ (mm)	1152	1152	1152
	3.7	Tread, rear	b ₁₁ (mm)	1136	1136	1136
	Dimensions	4.1	Tilt of mast/fork carriage, forward / backward	α / β (°)	6 / 10	6 / 10
4.2		Height, mast lowered	h ₁ (mm)	2171	2171	2171
4.3		Free lift ▲	h ₂ (mm)	100	100	100
4.4		Lift ▲	h ₃ (mm)	3000	3000	3000
4.5		Height, mast extended +	h ₄ (mm)	3815	3815	3815
4.7		Height of overhead guard (cabin)	h ₆ (mm)	2258	2258	2258
4.8		Seat height relating to SIP/stand height ✕	h ₇ (mm)	1279	1279	1279
4.12		Coupling height	h ₁₀ (mm)	429	429	429
4.19		Overall length	l ₁ (mm)	3946	3946	3946
4.20		Length to face of forks (Standard Carriage)	l ₂ (mm)	2946	2946	2946
4.20.1		Length to face of forks (Integrated Side Shift Carriage)	l ₂ (mm)	2978	2978	2978
4.21		Overall width □	b ₁ (mm)	1402 / 1485 / 1773	1402 / 1485 / 1773	1402 / 1485 / 1773
4.22		Fork dimensions ISO 2331	s/e/l (mm)	50 / 120 / 1000	50 / 120 / 1000	50 / 120 / 1000
4.23		Fork carriage ISO 2328, class/type A, B		IIIA	IIIA	IIIA
4.24		Fork carriage width (Standard Carriage) +	b ₃ (mm)	1219	1219	1219
4.24.1		Fork carriage width (ISS Carriage) +	b ₃ (mm)	1219	1219	1219
4.31		Ground clearance, laden, below mast	m ₁ (mm)	151	151	151
4.32		Ground clearance, centre of wheelbase	m ₂ (mm)	194	194	194
4.33		Load dimension b ₁₂ × l ₆ crossways	b ₁₂ × l ₆ (mm)	1200 x 1000	1200 x 1000	1200 x 1000
4.34		Aisle width predetermined load dimensions ○	A _{st} (mm)	4293	4293	4293
4.34.1		Aisle width with pallets 1000mm x 1200mm crossways ○	A _{st} (mm)	4493	4493	4493
4.34.2	Aisle width with pallets 800mm wide x 1200mm lengthways ○	A _{st} (mm)	4493	4493	4493	
4.35	Turning radius	W _a (mm)	2570	2570	2570	
4.36	Internal turning radius	b ₁₃ (mm)	751	751	751	
4.41	90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)	(mm)	2298	2298	2298	
4.42	Step height (from ground to running board)	(mm)	801	801	801	
4.43	Step height (between intermediate steps between running board and floor)	(mm)	441	441	441	
Performance data	5.1	Travel speed laden/unladen	km/h	19.9 / 20.5	24.9 / 25.4	24.9 / 25.4
	5.1.1	Travel speed, laden/unladen, backwards	km/h	19.9 / 20.5	19.9 / 20.5	19.9 / 20.5
	5.2	Lift speed, laden/unladen	m/s	0.62 / 0.63	0.62 / 0.63	0.62 / 0.63
	5.3	Lowering speed, laden/unladen	m/s	0.55 / 0.47	0.55 / 0.47	0.55 / 0.47
	5.5	Drawbar pull, laden/unladen *	N	25676 / 15616	30744 / 15616	30744 / 15616
	5.7	Gradeability, laden/unladen **	N	26.9 / 27.2	32.8 / 27.2	32.8 / 27.2
	5.9	Acceleration time, laden/unladen ***	%	5 / 4.2	5.2 / 4.3	5.2 / 4.3
	5.10	Service brake	s	Hydraulic	Hydraulic	Hydraulic
7.5	Fuel consumption according to VDI cycle	l/h or kg/h	4.5	4.5	4.5	
8.1	Type of drive unit		Hydrodynamic	Hydrodynamic	Hydrodynamic	
Addition data	10.1	Operating pressure for attachments	bar	155	155	155
	10.2	Oil volume for attachments ∩	l/min	83.3	83.3	83.3
	10.3	Hydraulic oil tank, capacity	litres	51.0	51.0	51.0
	10.4	Fuel tank, capacity	litres	79.0	79.0	79.0
	10.7	Sound pressure level at the driver's seat ⇔ ★	dB(A)	79	79	79
	10.7.1	Sound power level during the workcycle ◆	dB(A)	99	99	99
	10.7.2	Guaranteed sound power 2000/14/EC	dB(A)	103	103	103
	10.8	Towing coupling, type DIN		Pin	Pin	Pin

▲ Top of forks. ○ Stacking aisle width (lines 4.34 & 4.34.1 & 4.34.2) are based on the V.D.I. standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck. the vehicle on the stated inclines. Follow instructions in the operating manual regarding operation on inclines.

◆ Add 32mm with load backrest. * at 1.6km/h. ** at 4.8km/h. Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of *** to 15m (per VDI 2198 December 2012).

✦ Full suspension seat in depressed position.

□ W/o load backrest, add 32mm with load backrest.

□ Standard/Wide/Dual.

Yale	Yale	Yale	Yale	Yale	Yale	1.1
GDP 40VX6			GDP 45SVX5			1.2
Kubota 3.8L Techtronix 100, 1-Speed	Kubota 3.8L Techtronix 200, 2-Speed	Kubota 3.8L Techtronix 200, 2-Speed	Kubota 3.8L Techtronix 100, 1-Speed	Kubota 3.8L Techtronix 200, 2-Speed	Kubota 3.8L Techtronix 200, 2-Speed	
Value	Value	Productivity	Value	Value	Productivity	
Standard or Premium Oil-immersed	Standard or Premium Oil-immersed	Premium Oil-immersed	Standard or Premium Oil-immersed	Standard or Premium Oil-immersed	Premium Oil-immersed	
Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	1.3
Seated	Seated	Seated	Seated	Seated	Seated	1.4
4.0	4.0	4.0	4.5	4.5	4.5	1.5
600	600	600	500	500	500	1.6
523	523	523	591	591	591	1.8
555	555	555	608	608	608	1.8.1
1830	1830	1830	1830	1830	1830	1.9
6470	6470	6470	6826	6826	6826	2.1
9133 / 1337	9133 / 1337	9133 / 1337	10114 / 1212	10114 / 1212	10114 / 1212	2.2
2678 / 3792	2678 / 3792	2678 / 3792	2931 / 3895	2931 / 3895	2931 / 3895	2.3
SE	SE	SE	SE	SE	SE	3.1
250 x 15	250 x 15	250 x 15	250 x 15	250 x 15	250 x 15	3.2
7.00 x 12	7.00 x 12	7.00 x 12	7.00 x 12	7.00 x 12	7.00 x 12	3.3
2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	3.5
1152	1152	1152	1152	1152	1152	3.6
1136	1136	1136	1136	1136	1136	3.7
6 / 10	6 / 10	6 / 10	6 / 10	6 / 10	6 / 10	4.1
2171	2171	2171	2215	2215	2215	4.2
100	100	100	100	100	100	4.3
3000	3000	3000	2740	2740	2740	4.4
3815	3815	3815	3730	3730	3730	4.5
2258	2258	2258	2258	2258	2258	4.7
1279	1279	1279	1279	1279	1279	4.8
429	429	429	429	429	429	4.12
3977	3977	3977	4266	4266	4266	4.19
2977	2977	2977	3066	3066	3066	4.20
3009	3009	3009	3083	3083	3083	4.20.1
1402 / 1485 / 1773	1402 / 1485 / 1773	1402 / 1485 / 1773	1402 / 1485 / 1773	1402 / 1485 / 1773	1402 / 1485 / 1773	4.21
50 / 120 / 1200	50 / 120 / 1200	50 / 120 / 1200	60 / 150 / 1200	60 / 150 / 1200	60 / 150 / 1200	4.22
IIIA	IIIA	IIIA	IVA	IVA	IVA	4.23
1219	1219	1219	1219	1219	1219	4.24
1219	1219	1219	1219	1219	1219	4.24.1
151	151	151	151	151	151	4.31
194	194	194	194	194	194	4.32
1200 x 1000	1200 x 1000	1200 x 1000	1200 x 1000	1200 x 1000	1200 x 1000	4.33
4322	4322	4322	4342	4342	4342	4.34
4522	4522	4522	4542	4542	4542	4.34.1
4522	4522	4522	4542	4542	4542	4.34.2
2599	2599	2599	2619	2619	2619	4.35
751	751	751	751	751	751	4.36
2314	2314	2314	2332	2332	2332	4.41
801	801	801	801	801	801	4.42
441	441	441	441	441	441	4.43
19.9 / 20.5	24.9 / 25.3	24.9 / 25.3	19.8 / 20.4	24.6 / 25.3	24.6 / 25.3	5.1
19.9 / 20.5	19.9 / 20.5	19.9 / 20.5	19.8 / 20.4	19.8 / 20.4	19.8 / 20.4	5.1.1
0.62 / 0.63	0.62 / 0.63	0.62 / 0.63	0.45 / 0.46	0.45 / 0.46	0.45 / 0.46	5.2
0.55 / 0.47	0.55 / 0.47	0.55 / 0.47	0.51 / 0.42	0.51 / 0.42	0.51 / 0.42	5.3
25636 / 15292	30704 / 15292	30704 / 15292	25468 / 16781	30536 / 16781	30536 / 16781	5.5
26.3 / 25.7	32 / 25.7	32 / 25.7	24.3 / 26.7	29.5 / 26.7	29.5 / 26.7	5.7
5.1 / 4.2	5.2 / 4.4	5.2 / 4.4	5.3 / 4.3	5.3 / 4.5	5.3 / 4.5	5.9
Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	5.10
4.6	4.7	4.7	4.9	5.1	5.1	7.5
Hydrodynamic	Hydrodynamic	Hydrodynamic	Hydrodynamic	Hydrodynamic	Hydrodynamic	8.1
155	155	155	155	155	155	10.1
83.3	83.3	83.3	83.3	83.3	83.3	10.2
51.0	51.0	51.0	51.0	51.0	51.0	10.3
79.0	79.0	79.0	79.0	79.0	79.0	10.4
79	79	79	79	79	79	10.7
99	99	99	99	99	99	10.7.1
103	103	103	103	103	103	10.7.2
Pin	Pin	Pin	Pin	Pin	Pin	10.8
◇ Variable.						
⇒ With and without cab.						
★ Lpaz, Measured according to the test cycles and based on the weighting values contained in EN12053.		◆ LWAZ, measured according to the test cycles and based on the weighting values contained in EN12053.				
			Specification truck based on: 3050mm (GDP40VX5-GDP40VX6) / 2800mm (GDP45SVX5 - GDP55VX) top of forks 2 stage LFL mast with standard carriage, 1000mm (GDP40VX5) / 1200mm (GDP40VX6 - GDP55VX) forks with e-hydraulics.			

VDI 2198 – General Specifications, Diesel powered GDP 45VX6, GDP 50VX, GDP 55VX

Distinguishing mark	1.1	Manufacturer (abbreviation)		Yale	Yale	Yale
	1.2	Manufacturer's type designation			GDP 45VX6	
		Engine/Transmission		Kubota 3.8L Techtronix 100, 1-Speed	Kubota 3.8L Techtronix 200, 2-Speed	Kubota 3.8L Techtronix 200, 2-Speed
		Model		Value	Value	Productivity
		Brake Type		Premium Oil-immersed	Premium Oil-immersed	Premium Oil-immersed
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Diesel	Diesel	Diesel
	1.4	Operator type: hand, pedestrian, standing, seated, orderpicker		Seated	Seated	Seated
	1.5	Rated capacity / rated load	Q (t)	4.5	4.5	4.5
	1.6	Load centre distance	c (mm)	600	600	600
	1.8	Load distance, centre of drive axle to fork	x (mm)	591	591	591
1.8.1	Load distance, centre of drive axle to fork (ISS Carriage)	x (mm)	608	608	608	
1.9	Wheelbase	y (mm)	2100	2100	2100	
Weights	2.1	Service weight	kg	7225	7225	7225
	2.2	Axle loading, laden front / rear	kg	10323 / 1402	10323 / 1402	10323 / 1402
	2.3	Axle loading, unladen front / rear	kg	3271 / 3954	3271 / 3954	3271 / 3954
Tyres/chassis	3.1	Tyres: P = pneumatic, V = cushion, SE = superelastic		SE	SE	SE
	3.2	Tyre size, front		300x15	300 x 15	300 x 15
	3.3	Tyre size, rear		28 x 9-15	28 x 9-15	28 x 9-15
	3.5	Number of wheels, front/rear (x = driven wheels)		2x / 2	2x / 2	2x / 2
	3.6	Tread, front	b ₁₀ (mm)	1150	1150	1150
	3.7	Tread, rear	b ₁₁ (mm)	1162	1162	1162
	Dimensions	4.1	Tilt of mast/fork carriage, forward / backward	α / β (°)	6 / 10	6 / 10
4.2		Height, mast lowered	h ₁ (mm)	2215	2215	2215
4.3		Free lift ▲	h ₂ (mm)	100	100	100
4.4		Lift ▲	h ₃ (mm)	2740	2740	2740
4.5		Height, mast extended +	h ₄ (mm)	3730	3730	3730
4.7		Height of overhead guard (cabin)	h ₆ (mm)	2300	2300	2300
4.8		Seat height relating to SIP/stand height ✕	h ₇ (mm)	1321	1321	1321
4.12		Coupling height	h ₁₀ (mm)	429	429	429
4.19		Overall length	l ₁ (mm)	4457	4457	4457
4.20		Length to face of forks (Standard Carriage)	l ₂ (mm)	3257	3257	3257
4.20.1		Length to face of forks (Integrated Side Shift Carriage)	l ₂ (mm)	3274	3274	3274
4.21		Overall width □	b ₁ (mm)	1450 / 1575 / 1875	1450 / 1575 / 1875	1450 / 1575 / 1875
4.22		Fork dimensions ISO 2331	s/e/l (mm)	60 / 150 / 1200	60 / 150 / 1200	60 / 150 / 1200
4.23		Fork carriage ISO 2328, class/type A, B		IVA	IVA	IVA
4.24		Fork carriage width (Standard Carriage) +	b ₃ (mm)	1219	1219	1219
4.24.1		Fork carriage width (ISS Carriage) +	b ₃ (mm)	1372	1372	1372
4.31		Ground clearance, laden, below mast	m ₁ (mm)	194	194	194
4.32		Ground clearance, centre of wheelbase	m ₂ (mm)	237	237	237
4.33		Load dimension b ₁₂ x l ₆ crossways	b ₁₂ x l ₆ (mm)	1200 x 1000	1200 x 1000	1200 x 1000
4.34		Aisle width predetermined load dimensions ○	A _{st} (mm)	4628	4628	4628
4.34.1		Aisle width with pallets 1000mm x 1200mm crossways ○	A _{st} (mm)	4828	4828	4828
4.34.2		Aisle width with pallets 800mm wide x 1200mm lengthways ○	A _{st} (mm)	4828	4828	4828
4.35	Turning radius	W _a (mm)	2837	2837	2837	
4.36	Internal turning radius	b ₁₃ (mm)	800	800	800	
4.41	90° intersecting aisle (with pallet W = 1200mm, L = 1000mm)	(mm)	2447	2447	2447	
4.42	Step height (from ground to running board)	(mm)	844	844	844	
4.43	Step height (between intermediate steps between running board and floor)	(mm)	484	484	484	
Performance data	5.1	Travel speed laden/unladen	km/h	18.7 / 19.2	23.2 / 23.9	23.2 / 23.9
	5.1.1	Travel speed, laden/unladen, backwards	km/h	18.7 / 19.2	18.7 / 19.2	18.7 / 19.2
	5.2	Lift speed, laden/unladen	m/s	0.45 / 0.46	0.45 / 0.46	0.45 / 0.46
	5.3	Lowering speed, laden/unladen	m/s	0.51 / 0.42	0.51 / 0.42	0.51 / 0.42
	5.5	Drawbar pull, laden/unladen *	N	27516 / 18782	32917 / 18782	32917 / 18782
	5.7	Gradeability, laden/unladen **	N	24 / 28.3	29.1 / 28.3	29.1 / 28.3
	5.9	Acceleration time, laden/unladen ***	%	5.4 / 4.5	5.5 / 4.7	5.5 / 4.7
	5.10	Service brake	s	Hydraulic	Hydraulic	Hydraulic
7.5	Fuel consumption according to VDI cycle	l/h or kg/h	5.1	5.3	5.3	
8.1	Type of drive unit		Hydrodynamic	Hydrodynamic	Hydrodynamic	
Addition data	10.1	Operating pressure for attachments	bar	155	155	155
	10.2	Oil volume for attachments ∩	l/min	83.3	83.3	83.3
	10.3	Hydraulic oil tank, capacity	litres	67.8	67.8	67.8
	10.4	Fuel tank, capacity	litres	100.3	100.3	100.3
	10.7	Sound pressure level at the driver's seat ⇔ ★	dB(A)	79	79	79
	10.7.1	Sound power level during the workcycle ◆	dB(A)	99	99	99
	10.7.2	Guaranteed sound power 2000/14/EC	dB(A)	103	103	103
	10.8	Towing coupling, type DIN		Pin	Pin	Pin

▲ Top of forks. ○ Stacking aisle width (lines 4.34 & 4.34.1 & 4.34.2) are based on the V.D.I. standard calculation as shown on illustration. The British Industrial Truck Association recommends the addition of 100 mm to the total clearance (dimension a) for extra operating margin at the rear of the truck. the vehicle on the stated inclines. Follow instructions in the operating manual regarding operation on inclines.

◆ Add 32mm with load backrest. * at 1.6km/h. ** at 4.8km/h. Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of *** to 15m (per VDI 2198 December 2012).

✦ Full suspension seat in depressed position.

□ W/o load backrest, add 32mm with load backrest.

□ Standard/Wide/Dual.

Yale	Yale	Yale	Yale	Yale	Yale	1.1
GDP 50VX			GDP 55VX			1.2
Kubota 3.8L Techtronix 100, 1-Speed Value	Kubota 3.8L Techtronix 200, 2-Speed Value	Kubota 3.8L Techtronix 200, 2-Speed Productivity	Kubota 3.8L Techtronix 100, 1-Speed Value	Kubota 3.8L Techtronix 200, 2-Speed Value	Kubota 3.8L Techtronix 200, 2-Speed Productivity	
Premium Oil-immersed	Premium Oil-immersed	Premium Oil-immersed	Premium Oil-immersed	Premium Oil-immersed	Premium Oil-immersed	
Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	1.3
Seated	Seated	Seated	Seated	Seated	Seated	1.4
5.0	5.0	5.0	5.5	5.5	5.5	1.5
600	600	600	600	600	600	1.6
591	591	591	591	591	591	1.8
608	608	608	608	608	608	1.8.1
2100	2100	2100	2100	2100	2100	1.9
7520	7520	7520	7811	7811	7811	2.1
11041 / 1478	11041 / 1478	11041 / 1478	11754 / 1558	11754 / 1558	11754 / 1558	2.2
3206 / 4314	3206 / 4314	3206 / 4314	3134 / 4677	3134 / 4677	3134 / 4677	2.3
SE	SE	SE	SE	SE	SE	3.1
300 x 15	300 x 15	300 x 15	300 x 15	300 x 15	300 x 15	3.2
28 x 9-15	28 x 9-15	28 x 9-15	28 x 9-15	28 x 9-15	28 x 9-15	3.3
2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	2x / 2	3.5
1150	1150	1150	1150	1150	1150	3.6
1162	1162	1162	1162	1162	1162	3.7
6 / 10	6 / 10	6 / 10	6 / 10	6 / 10	6 / 10	4.1
2215	2215	2215	2215	2215	2215	4.2
100	100	100	100	100	100	4.3
2740	2740	2740	2740	2740	2740	4.4
3730	3730	3730	3730	3730	3730	4.5
2300	2300	2300	2300	2300	2300	4.7
1321	1321	1321	1321	1321	1321	4.8
429	429	429	429	429	429	4.12
4500	4500	4500	4541	4541	4541	4.19
3300	3300	3300	3341	3341	3341	4.20
3317	3317	3317	3358	3358	3358	4.20.1
1450 / 1575 / 1875	1450 / 1575 / 1875	1450 / 1575 / 1875	1450 / 1575 / 1875	1450 / 1575 / 1875	1450 / 1575 / 1875	4.21
60 / 150 / 1200	60 / 150 / 1200	60 / 150 / 1200	60 / 150 / 1200	60 / 150 / 1200	60 / 150 / 1200	4.22
IVA	IVA	IVA	IVA	IVA	IVA	4.23
1219	1219	1219	1219	1219	1219	4.24
1372	1372	1372	1372	1372	1372	4.24.1
194	194	194	194	194	194	4.31
237	237	237	237	237	237	4.32
1200 x 1000	1200 x 1000	1200 x 1000	1200 x 1000	1200 x 1000	1200 x 1000	4.33
4668	4668	4668	4706	4706	4706	4.34
4868	4868	4868	4906	4906	4906	4.34.1
4868	4868	4868	4906	4906	4906	4.34.2
2877	2877	2877	2915	2915	2915	4.35
800	800	800	800	800	800	4.36
2469	2469	2469	2490	2490	2490	4.41
844	844	844	844	844	844	4.42
484	484	484	484	484	484	4.43
18.7 / 19.2	23.2 / 23.9	23.2 / 23.9	18.6 / 19.2	22.9 / 23.9	22.9 / 23.9	5.1
18.7 / 19.2	18.7 / 19.2	18.7 / 19.2	18.6 / 19.2	18.6 / 19.2	18.6 / 19.2	5.1.1
0.45 / 0.46	0.45 / 0.46	0.45 / 0.46	0.45 / 0.46	0.45 / 0.46	0.45 / 0.46	5.2
0.51 / 0.42	0.51 / 0.42	0.51 / 0.42	0.51 / 0.42	0.51 / 0.42	0.51 / 0.42	5.3
27458 / 18399	32859 / 18399	32859 / 18399	27302 / 17976	32703 / 17976	32703 / 17976	5.5
23.3 / 26.5	28.3 / 26.5	28.3 / 26.5	21.7 / 24.8	26.3 / 24.8	26.3 / 24.8	5.7
5.4 / 4.5	5.5 / 4.6	5.5 / 4.6	5.6 / 4.5	5.6 / 4.7	5.6 / 4.7	5.9
Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	5.10
5.4	5.8	5.8	5.8	6.2	6.2	7.5
Hydrodynamic	Hydrodynamic	Hydrodynamic	Hydrodynamic	Hydrodynamic	Hydrodynamic	8.1
155	155	155	155	155	155	10.1
83.3	83.3	83.3	83.3	83.3	83.3	10.2
67.8	67.8	67.8	67.8	67.8	67.8	10.3
100.3	100.3	100.3	100.3	100.3	100.3	10.4
79	79	79	79	79	79	10.7
99	99	99	99	99	99	10.7.1
103	103	103	103	103	103	10.7.2
Pin	Pin	Pin	Pin	Pin	Pin	10.8

Distinguishing mark

Weights

Tyres/chassis

Dimensions

Performance data

Addition data

♦ Variable.
 ⇨ With and without cab.
 ★ Lpaz, Measured according to the test cycles and based on the weighting values contained in EN12053.

♦ LWAZ, measured according to the test cycles and based on the weighting values contained in EN12053.

Specification truck based on:
 3050mm (GDP40 VX5-GDP40 VX6) / 2800mm (GDP45S VX5 - GDP55 VX) top of forks 2 stage LFL mast with standard carriage, 1000mm (GDP40 VX5) / 1200mm (GDP40 VX6 - GDP55 VX) forks with e-hydraulics.

VX series

Models: GDP 40VX5, 40VX6, 45SVX5, 45VX6, 50VX, 55VX

Yale Veracitor VX Series

This series of trucks is available in two configurations:-

The Veracitor Value truck provides excellent performance for standard and medium-duty applications, optimised for lowest hourly operation cost.

The Veracitor Productivity truck delivers maximum performance for medium to heavy-duty applications with state-of-the-art features and industry leading power.

Diesel Engines

Yale VX40-55 Value and Productivity models feature the electronically controlled Kubota V3800 E4 turbocharged diesel engine, delivering 55kW at 2200 rpm. The Kubota V3800 E4 diesel engine is fully compliant with Stage IIIB requirements for regulated markets and is equipped with a Diesel Particulate Filter or Diesel Oxidizing Catalyst as standard. This engine meets the stringent emissions regulations by using a number of technologies including cooled exhaust gas recirculation, charge air cooling and an active regenerating Diesel particulate filter (DPF) or a Diesel Oxidising Catalyst (DOC).

Stage IIIB = High productivity and low emissions. These low emissions trucks can be recognised by the Stage IIIB symbol.



Note: A Stage IIIB engine must run on Ultra Low Sulphur Diesel (ULSD) fuel, with a maximum of 15 ppm sulphur content. Diesel fuel with a higher sulphur content than 15ppm will compromise the emissions performance of the Stage IIIB engine and may result in damage to components and a reduction in engine life.

Load Sensing Hydraulics (LSH)

LSH is standard on trucks with AccuTouch™ mini levers, delivering increased operational efficiency, offering a 15% reduction in fuel consumption on the VDI cycle, with no loss in productivity*. Variable displacement hydraulic piston pump matches the oil flow rate continuously to the lifting speed and the demands of the duty cycle. The engine therefore supplies only power to the hydraulic pumps when required, so more power is available for driving. This increases responsiveness and acceleration, which increases productivity and lowers fuel consumption, reducing overall operating costs.

With LSH Yale also offers an ECO-eLo (Fuel Efficiency) mode, reducing engine speed by 20% and optimising throttle response, so that the truck operates in the most economical power range. This results in a reduction in fuel consumption of a further 5%*, but has a limited effect on overall truck productivity in the operational environment. The ECO-eLo mode also delivers lower noise levels by up to 3dB(A). If a faster work rate, or higher productivity is required, the truck can easily be reprogrammed to HiP (High Performance) mode of operation through the dash display, with access secured by a unique customer password.

(*Yale Productivity Test Cycle: Load Sensing Hydraulics and ECO-eLo functions are available on trucks with AccuTouch™ mini-levers and Techtronix™ transmissions only).

Transmission

Two transmission selections are available with multiple engine configurations for a wide variety of material handling applications. A single pedal controls both inching and braking.

The Techtronix 100 features electronic inching, Auto Deceleration System (ADS) through the controlled application of clutch packs to slow the truck down without the need to apply the foot brake. Controlled Power Reversal (CPR) reduces tyre spin by precisely regulating engine speed during full power reversal situations and Controlled Roll-Back (CRB) limits roll-back on gradients to 75mm per second.

The Techtronix 200 has all the Techtronix 100 features, plus Two Speed Auto Shift (2 x forward, 1 x reverse).

The Techtronix transmissions are available with Auto-speed Hydraulics, which automatically increases engine speed on activation of the hydraulics, eliminating the need for inching when lifting the load.

Cooling System

The cooling system employs a 43cm blade pusher-type fan. A permanently lubricated water pump and a high capacity, cross-flow radiator ensures rapid heat dissipation. The sealed cooling system operates at 15 psi, the coolant recovery tank allows visual inspection of coolant level. The combi-cooler radiator features an externally



mounted transmission oil cooler for increased heat transfer capability. All radiators are soft mounted for durability.

Drive Axle

The drive axle is designed to withstand heavy-duty applications and absorb shock loads. It is a "self-contained" assembly isolated from the transmission by a heavy-duty rubber isolator. The axle shafts utilise a "rolled fillet" root spline design for increased resistance to torsion stress. A magnetic sump plug collects any metal particles circulating in the axle oil to prevent component wear.

Brakes

The Standard oil-immersed brake axle is a self-contained unit with its own oil supply, whereas the Premium oil-immersed brake axle features an additional oil supply routed through the Combi-Cooler. The Premium oil-immersed brakes axle should be specified into multiple shift operations, or where the brakes are in constant use. The Standard oil-immersed brake axle is not available on long wheelbase models.

Hydraulic Power Steering

Hydrostatic steering provides responsive control and eliminates mechanical linkages for reduced surface shock and simplified maintenance. The steering wheel is 30cm in diameter with a textured surface grip and spinner knob, and requires only four turns lock-to-lock.



Operator's Compartment

All trucks are available with a mini-lever armrest, which features a contoured design, and - in addition to the hydraulic functions - features a horn and direction switch, ensuring that all key truck functions are within constant, easy reach. The Full Suspension Seat together with the isolated powertrain provide best in class Whole-Body Vibration levels of $0.6m/s^2$, ensuring that the operator remains comfortable throughout the shift and minimising the operator exposure to vibration over the shift. Automotive-style pedal arrangement with a large, single inch/brake pedal is standard.

A full range of cabs including heating and air conditioning are available.

Intellix Vehicle System Management (VSM)

VSM acts as a master truck controller, providing extensive monitoring and control of truck functions and systems. CANbus technology reduces wiring complexity and enables communications between truck systems. The dash display transmits continual feedback to the operator and allows communication of service codes. On-board diagnostics enable quick and easy troubleshooting. The electrical system features sealed connectors and Hall Effect sensors for superior dependability.

Hydraulic System

The hydraulic system incorporates a low noise gear type pump with cast iron body or for trucks fitted with Load Sense Hydraulics (with AccuTouch™ levers) a variable piston pump delivering oil flow on demand. The system is protected from overloads by a main relief valve for the lift circuit and secondary relief valve for tilt and auxiliary functions. Oil is double filtered through a 100 mesh suction line strainer and 10 micron return line filter. The hydraulic tank is integrated into the frame.

For AccuTouch™ electrohydraulic controls, an emergency lowering valve is provided to allow the load to be lowered in the event of power loss. O-ring face seal fittings are used in all high pressure hydraulic connections.



The centre mounted steer cylinder is located within the confines of the steer axle for protection.

Steer Axle

Constructed from cast steel, the steer axle is rubber shock mounted to the frame for reduced wear and vibration.

Continuous Stability Enhancement (CSE)

The CSE system enhances lateral truck stability through reduced steer axle articulation, while simultaneously allowing uncompromised uneven surface travel.

VX series

Models: GDP 40VX5, 40VX6, 45SVX5, 45VX6,
50VX, 55VX



HYSTER-YALE UK LIMITED

trading as **Yale Europe Materials Handling**
Centennial House,
Frimley Business Park,
Frimley, Surrey GU16 7SG, United Kingdom.



Tel: +44 (0) 1276 538500 Fax: +44 (0) 1276 538559

www.yale-forklifts.eu



Publication part no. 220990320 Rev.00 Printed in The Netherlands (0116HG) EN.

Safety: This truck conforms to the current EU requirements. Specification is subject to change without notice.

Yale, VERACITOR and  are registered trademarks. "PEOPLE, PRODUCTS, PRODUCTIVITY", PREMIER, Hi-Vis, and CSS are trademarks in the United States and certain other jurisdictions. MATERIALS HANDLING CENTRAL and MATERIAL HANDLING CENTRAL are Service Marks in the United States and certain other jurisdictions.  is a Registered Copyright. © Yale Europe Materials Handling 2016. All rights reserved. Truck shown with optional equipment.

Country of Registration: England and Wales. Company Registration Number: 02636775